

Improved Info Center Backlighting

Population Affected:

XC, XCS, XCF, XCM, XCR, XB, XBS, and XBR

Built from 8/29/2003 to 6/5/2005

Symptoms:

Customer complaints about location and viewability of graphics on the original display.

Issue / Description:

Freightliner Custom Chassis announces the availability of a new product improvement Info Center that uses a black/white Super Twisted Nematic module with film retardation (FSTN) for wider viewing angle and high black and white contrast. The original Info Center was a Graphic LCD Module display that used a green/black Twisted Nematic (TN) technology.

Solution / Work Instructions:

Inspection Check:

- 1. Make sure that recalls and campaigns such as FL425 have been done (**if applicable**). This will insure the latest available programming has been installed for your vehicle.*
- 2. Also make sure the display being replaced is an older green/black TN Display (KYS-15391018101).*

Replacement Parts:

- 1. Freightliner p/n KYS-15391020711 – direct parts supercession for original part KYS-15391018101.*

NOTE: For a limited time Owners can order direct from Medallion at a special introductory price. Call 888-750-2132 and ask for p/n 1539-10207-11.

Tools:

- 1. n/a*

Removal and Replacement:

- 1. The exact R&R is different for each Body Builder, and is fairly simple. So, a step by step R&R is not listed here.*


Warranty:

Always check ServicePro to see if any campaigns apply to your VIN#.


This is a product improvement and normal Freightliner LLC warranty procedures apply.

SS-2225
 Rev: n/a

Reference Graphics:

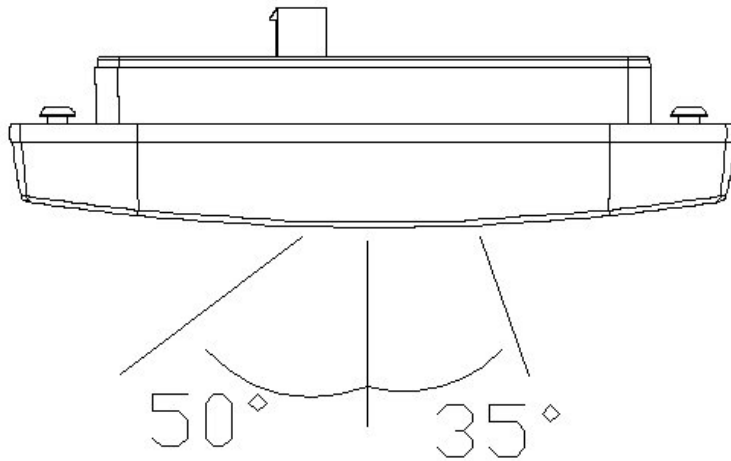


NEW BLACK AND WHITE
 STN INFO CENTER
 OPTREX

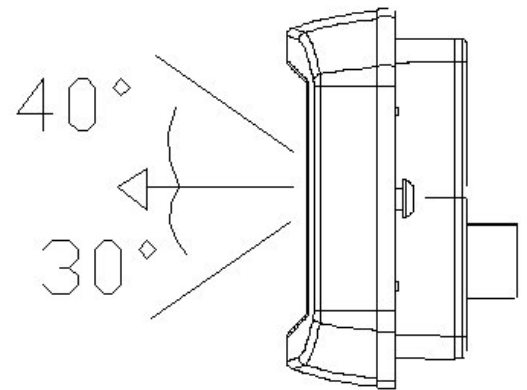

NEW Improved Viewing Angles

OLD

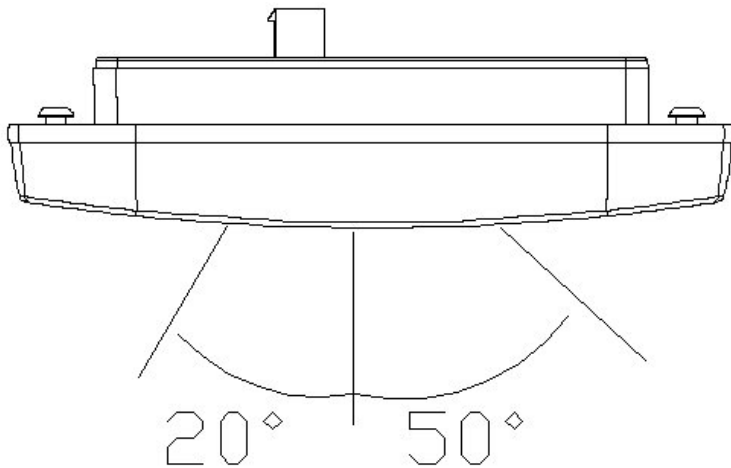

OLD GREEN AND BLACK
 TN INFO CENTER
 SEIKO

