


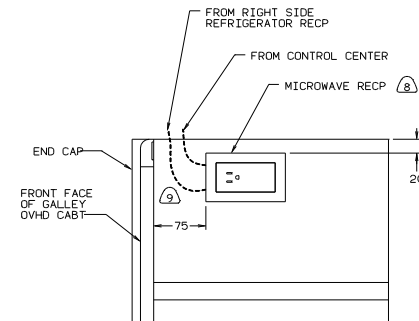


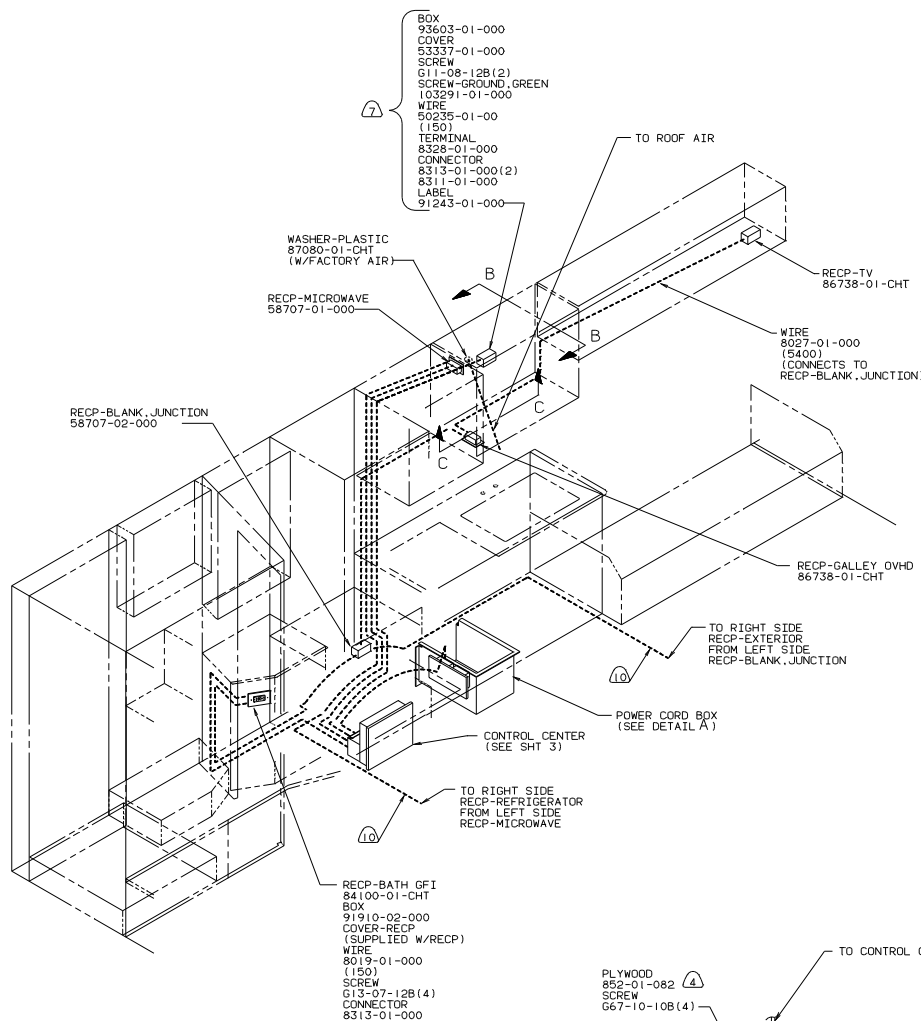

VIEW B-B

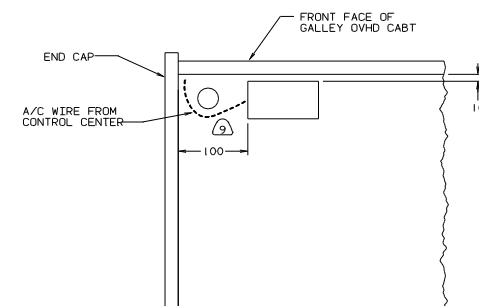

VIEW C-C 7

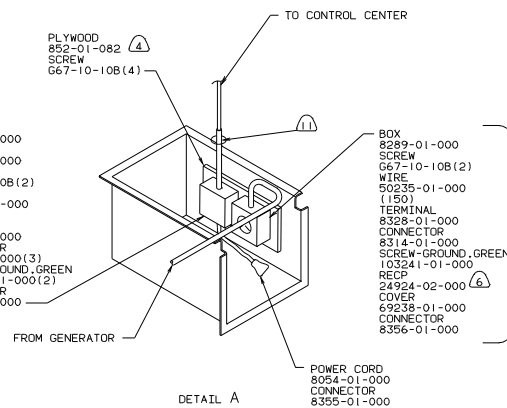


DETAIL A

- (1) SEAL WITH BEDDING COMPOUND 69639-01-000.
 - (10) WIRE ROUTED THROUGH FLOOR.
 - (9) DO NOT USE CONVOLUTED TUBING IN THIS AREA.
 - (8) BRING BOTH WIRES IN SAME END OF RECP AS SHOWN.
 - (7) USE WITHOUT FACTORY AIR.
 - (6) INSTALL RECP WITH GROUND TOWARD OUTBOARD SIDE OF VEHICLE.
 - (5) USE WITH GENERATOR ONLY.
 - (4) PAINT ALL EXPOSED SURFACES BLACK WITH 106112-01-000.
3. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
 2. ALL 110V WIRES ARE TO BE CLAMPED WITH CLAMP 10495-01-000 WITHIN 200 OF OUTLET BOXES. USE SCREW G67-10-12B.
 1. ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000 ON TOP OF 80734-01-000 (1220). USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.


110V (US)
LEFT SIDE





		95 327RC	
QFTD		UNSPECIFIED TOLERANCES ARE	MATERIAL
CHWD		WALL THICK (IN.)	
P E		ONE-PLATE (IN. X)	
N E		TWO-PLATE (IN. X)	
		ANGLE	
		THIRD-PLATE	
		PROJECTION	
LEADHT			
TITLE		WIRING INSTL-COMP	
Q14 OF SCALE NONE	DO NOT SCALE DRAWING	SIZE	CMG
ALL DIMENSIONS ARE IN MILLIMETERS		DATE	114477

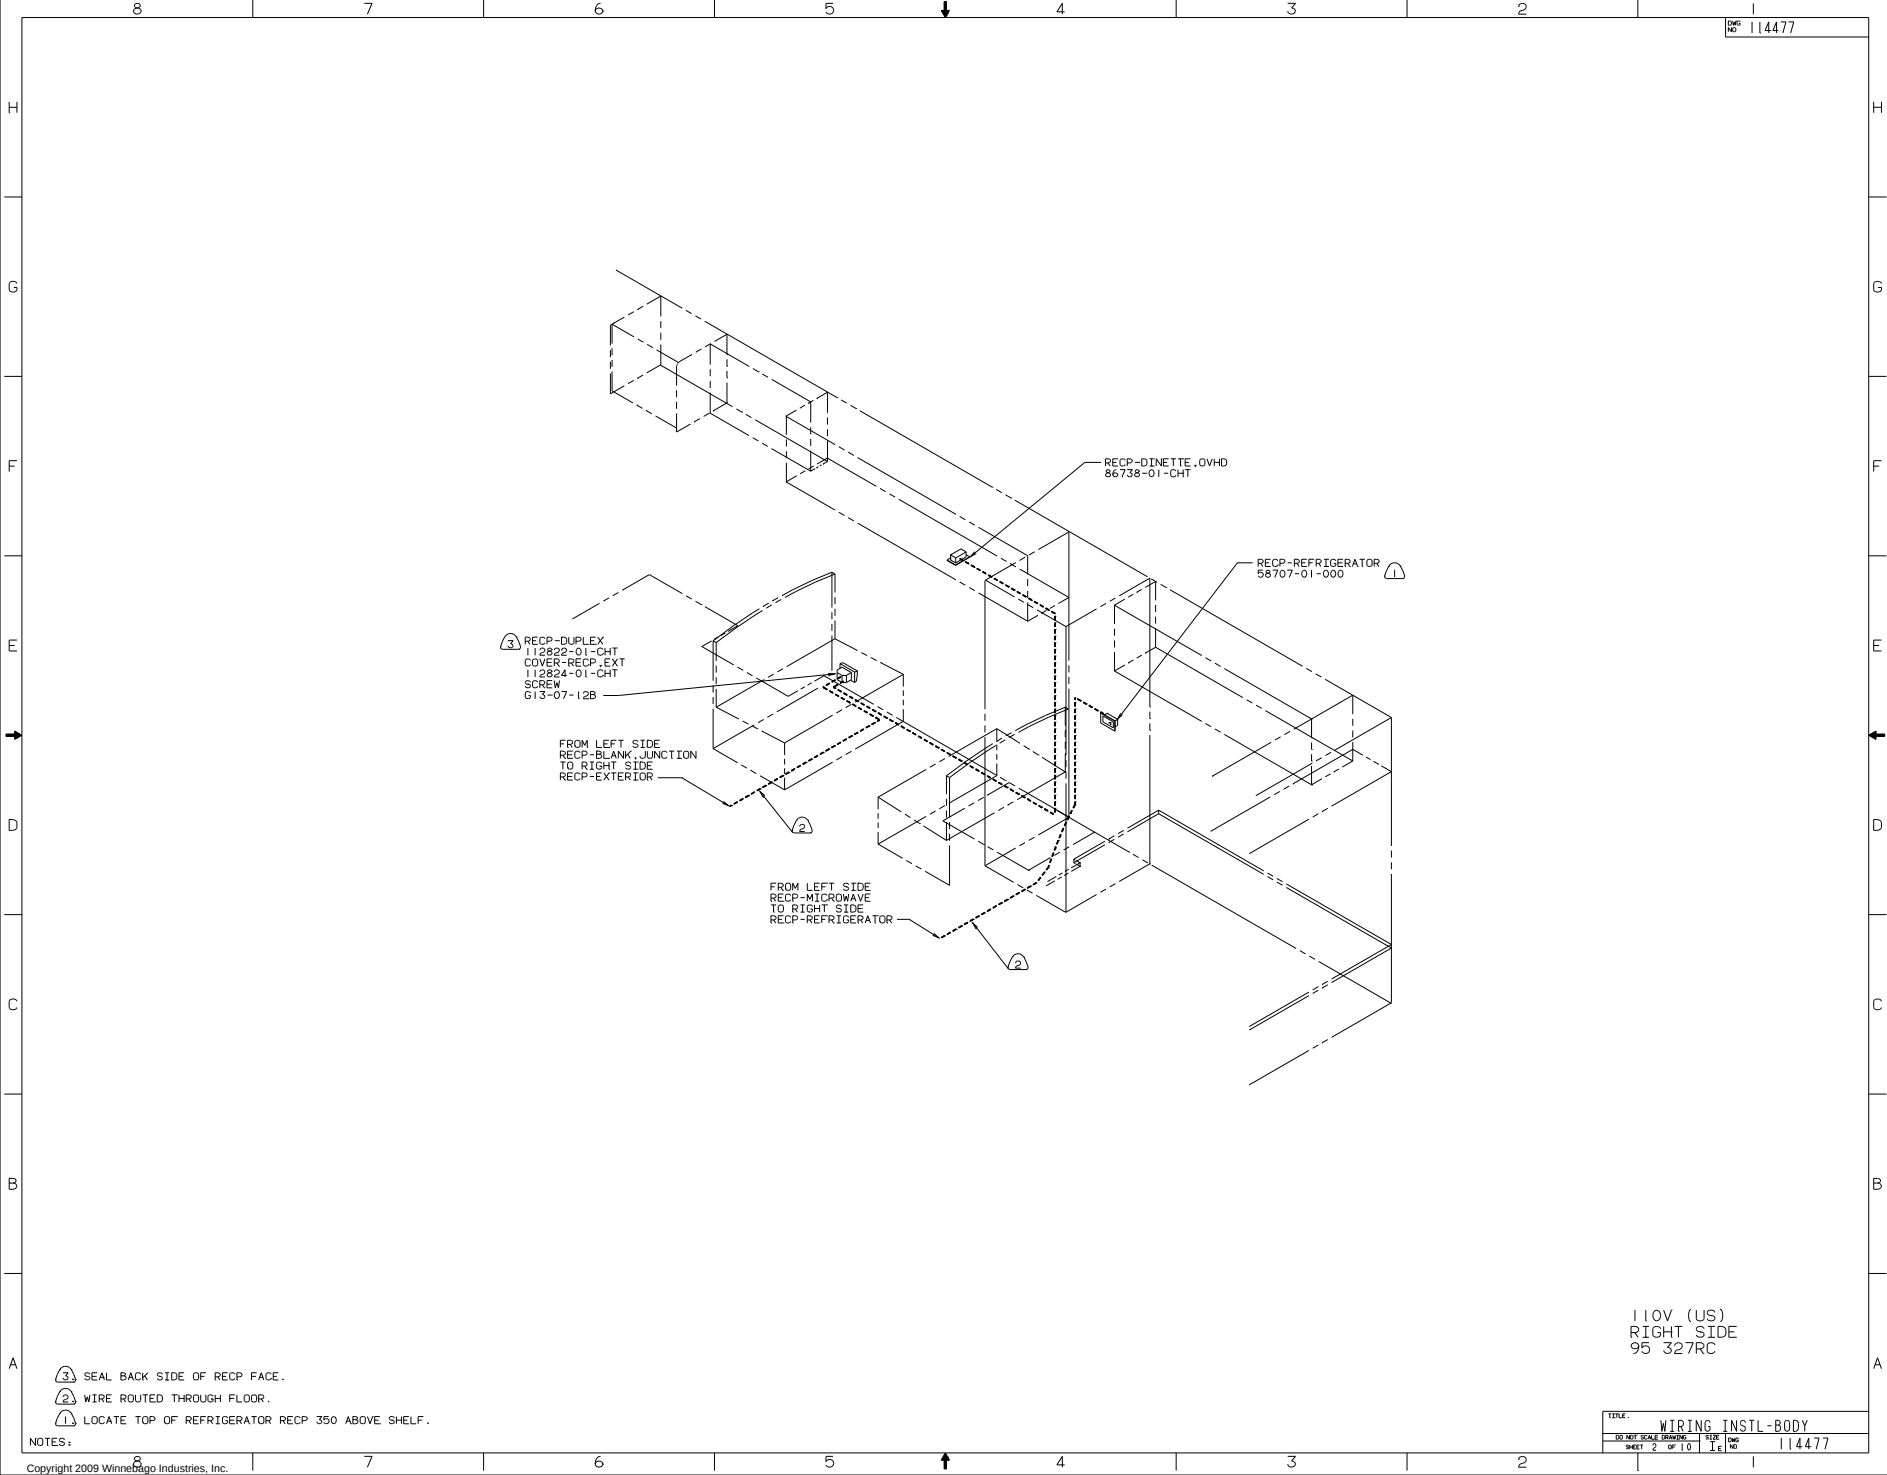

110V (US)
RIGHT SIDE
95 327RC

- NOTES:
- ③ SEAL BACK SIDE OF REC- FACE.
 - ② WIRE ROUTED THROUGH FLOOR.
 - ① LOCATE TOP OF REFRIGERATOR REC- 350 ABOVE SHELF.

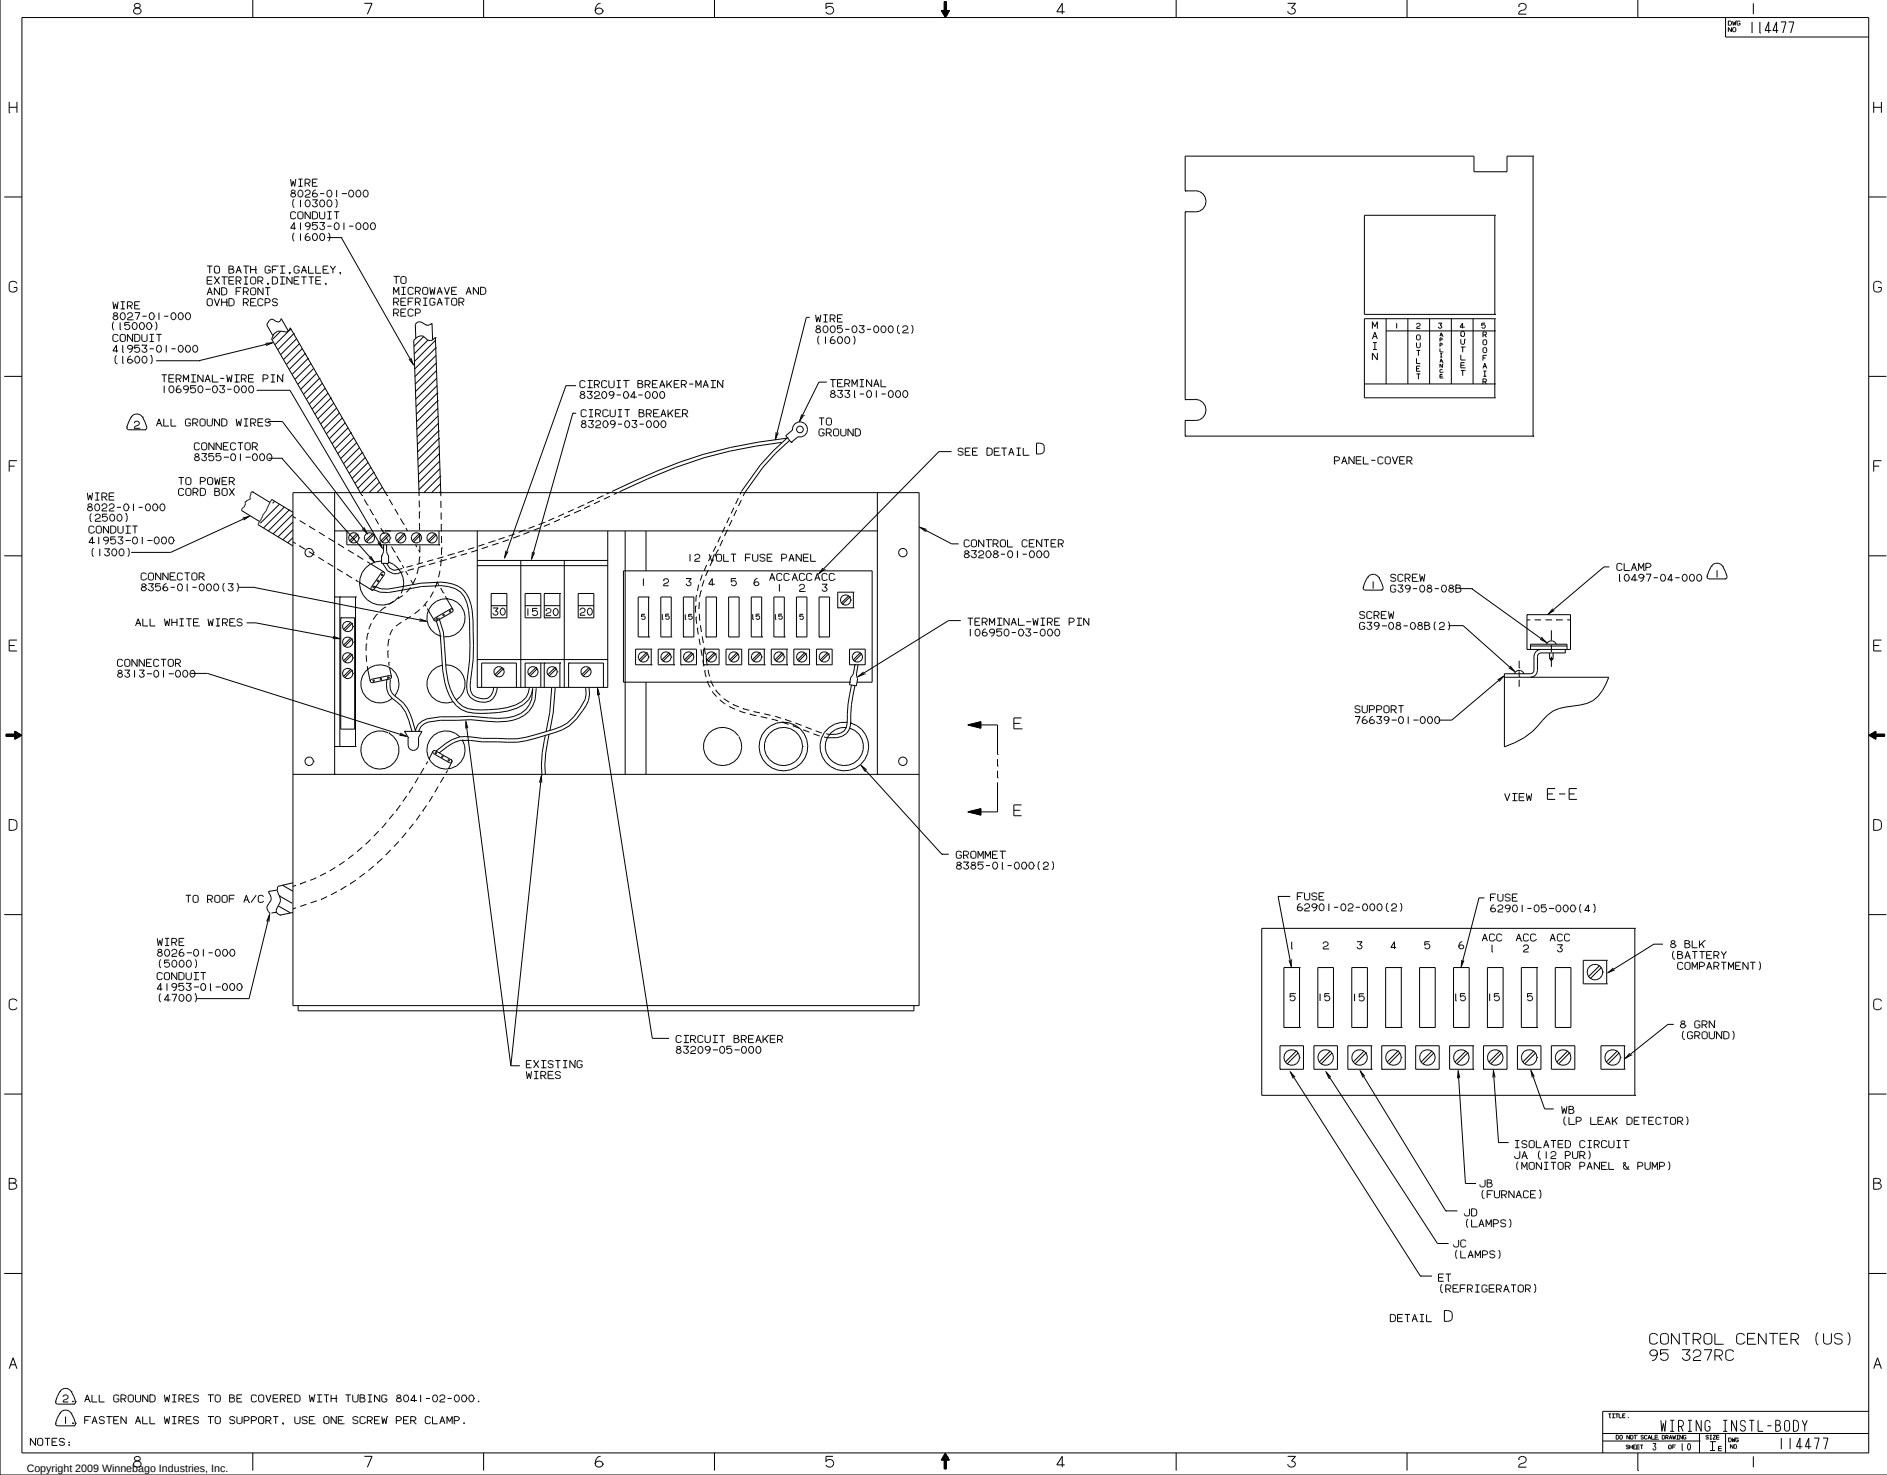


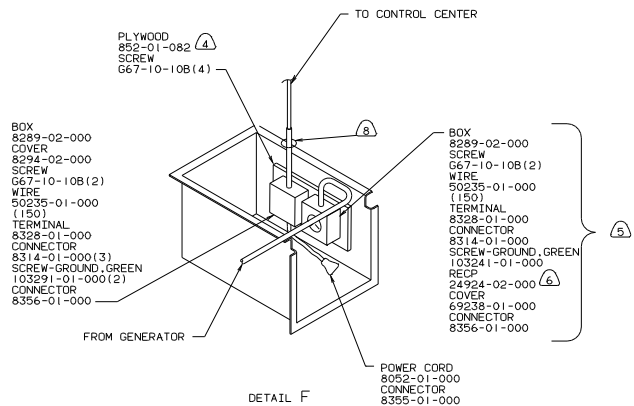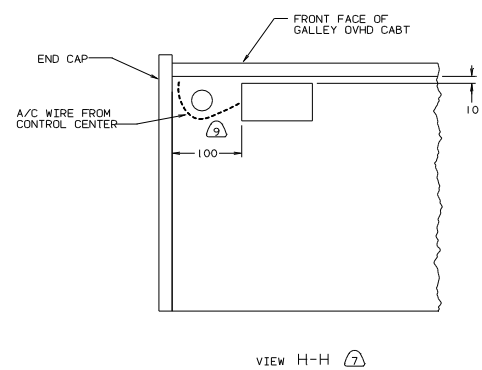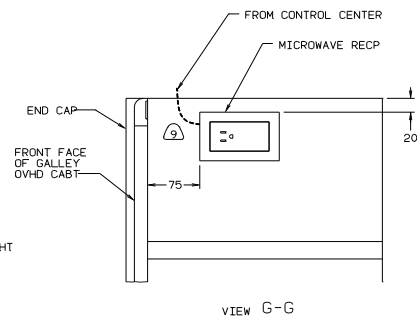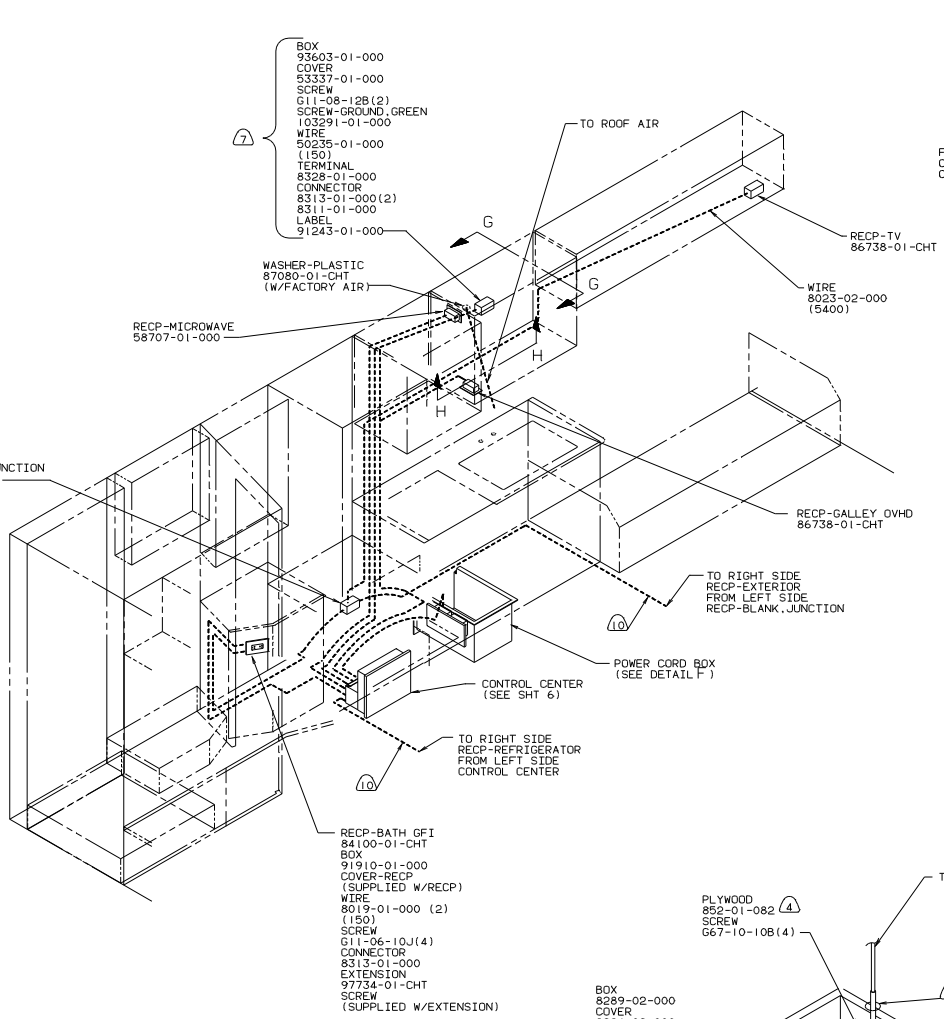

- 10 WIRE ROUTED THROUGH FLOOR.
- 9 USE NO CONVOLUTED TUBING IN THIS AREA.
- 8 SEAL WITH BEDDING COMPOUND 69639-01-000.
- 7 USE WITHOUT FACTORY AIR.
- 6 INSTALL REC WITH GROUND TOWARD OUTBOARD SIDE OF VEHICLE.
- 5 USE WITH GENERATOR ONLY.
- 4 PAINT ALL EXPOSED SURFACES BLACK WITH 106112-01-000.
- 3 ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
- 2 ALL 110V WIRES ARE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200 OF OUTLET BOXES. USE SCREW G67-10-12B.
- 1 ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 1220. USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

NOTES:


110V (CAN)
LEFT SIDE
95 327RC

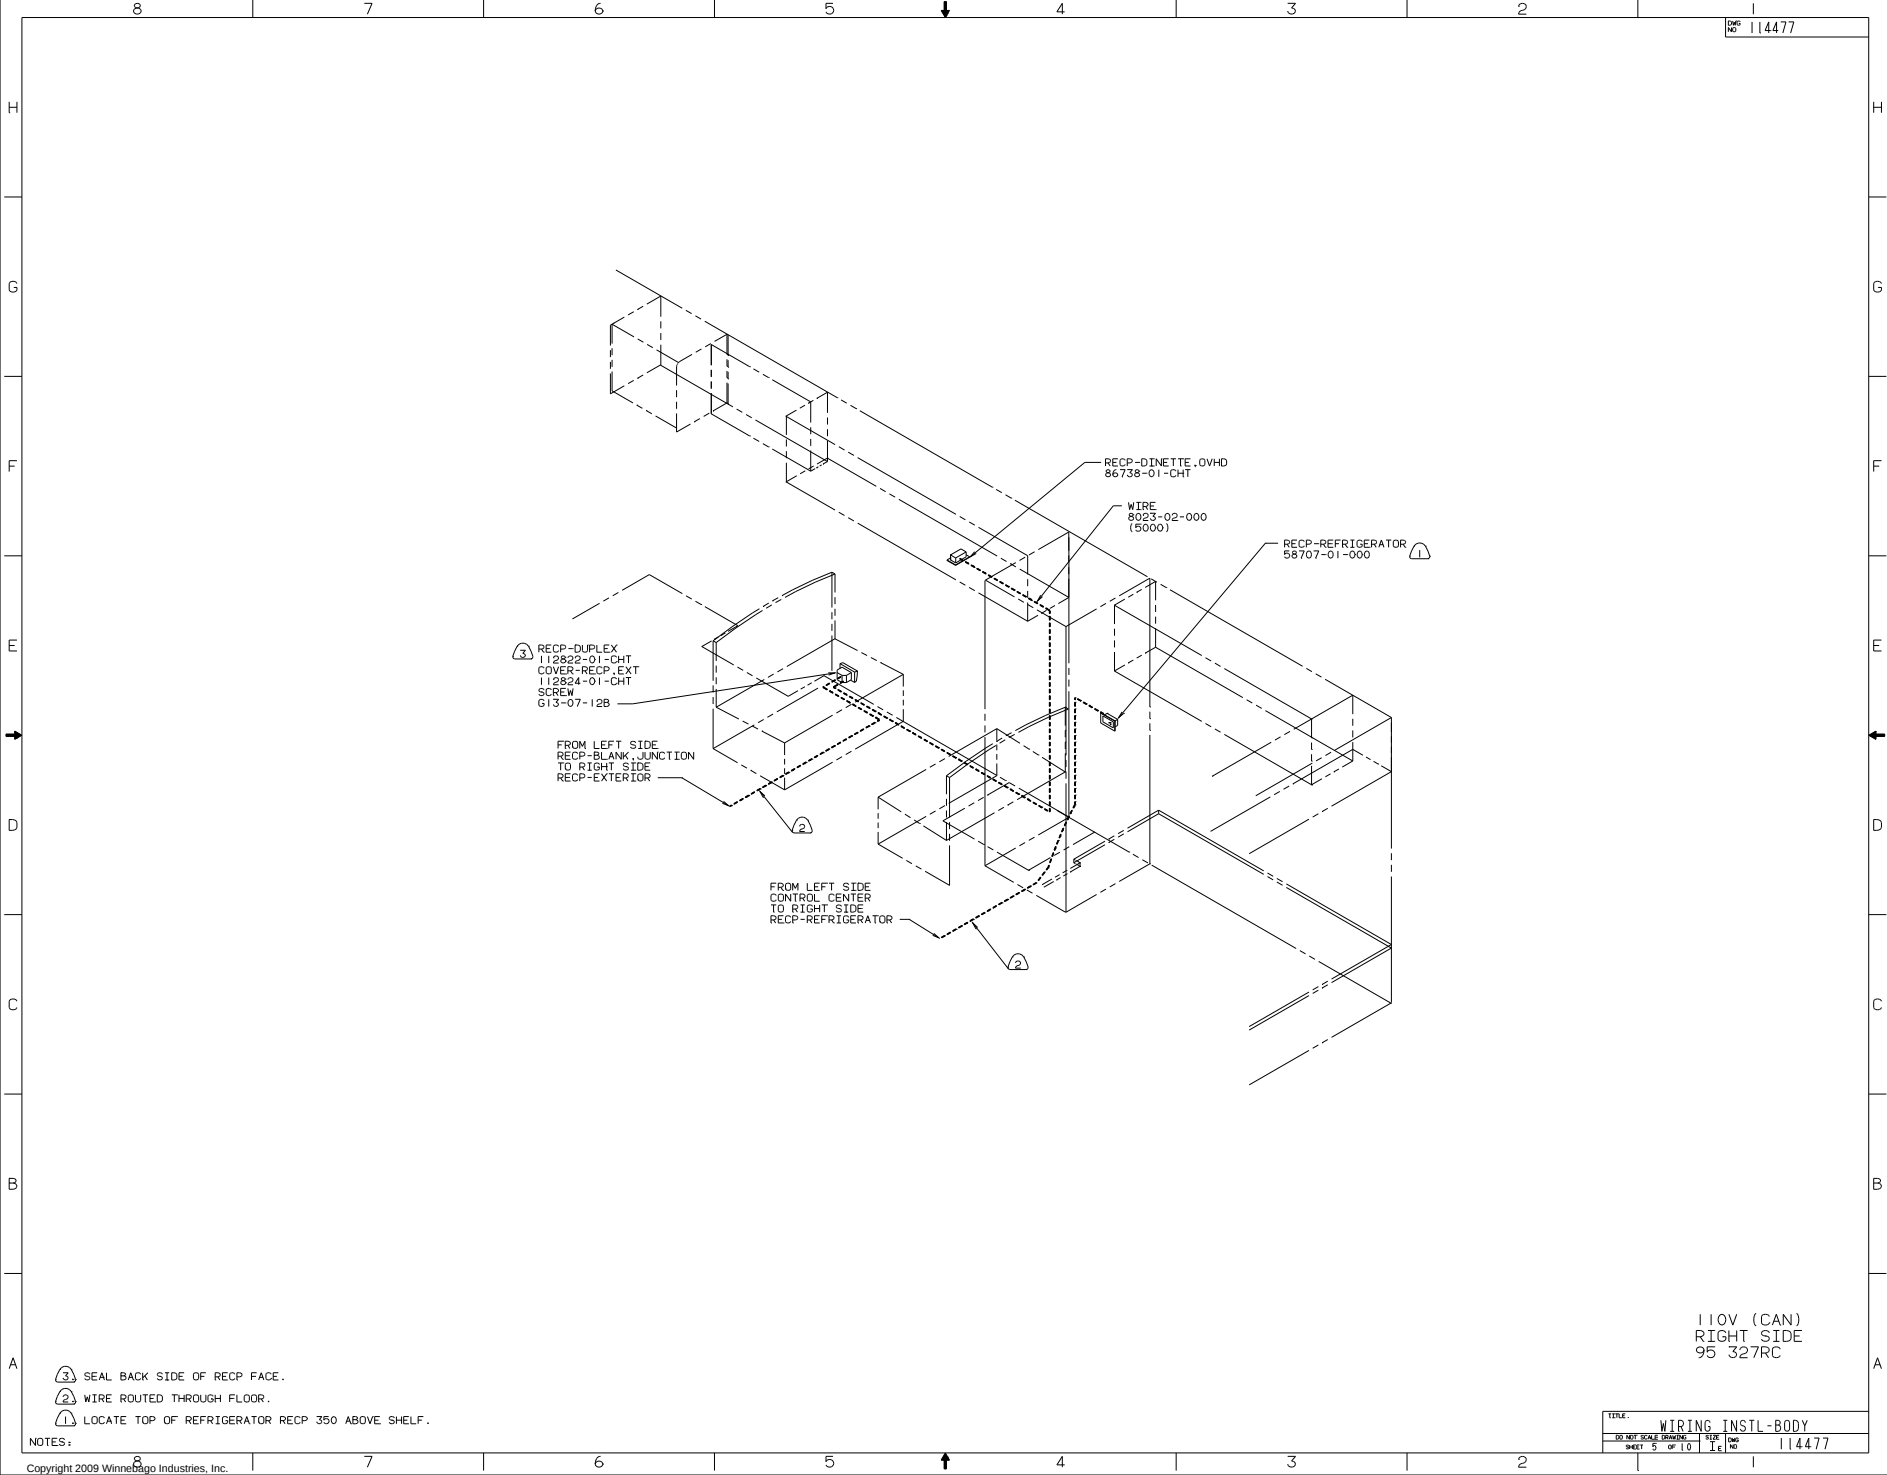

- NOTES:
- (3) SEAL BACK SIDE OF RECP FACE.
 - (2) WIRE ROUTED THROUGH FLOOR.
 - (1) LOCATE TOP OF REFRIGERATOR RECP 350 ABOVE SHELF.


110V (CAN)
RIGHT SIDE
95 327RC

TITLE		WIRING INSTL-BODY	
DO NOT SCALE DRAWING	FILE	ENG	NO
SHEET 5 OF 10	1	NO	114477

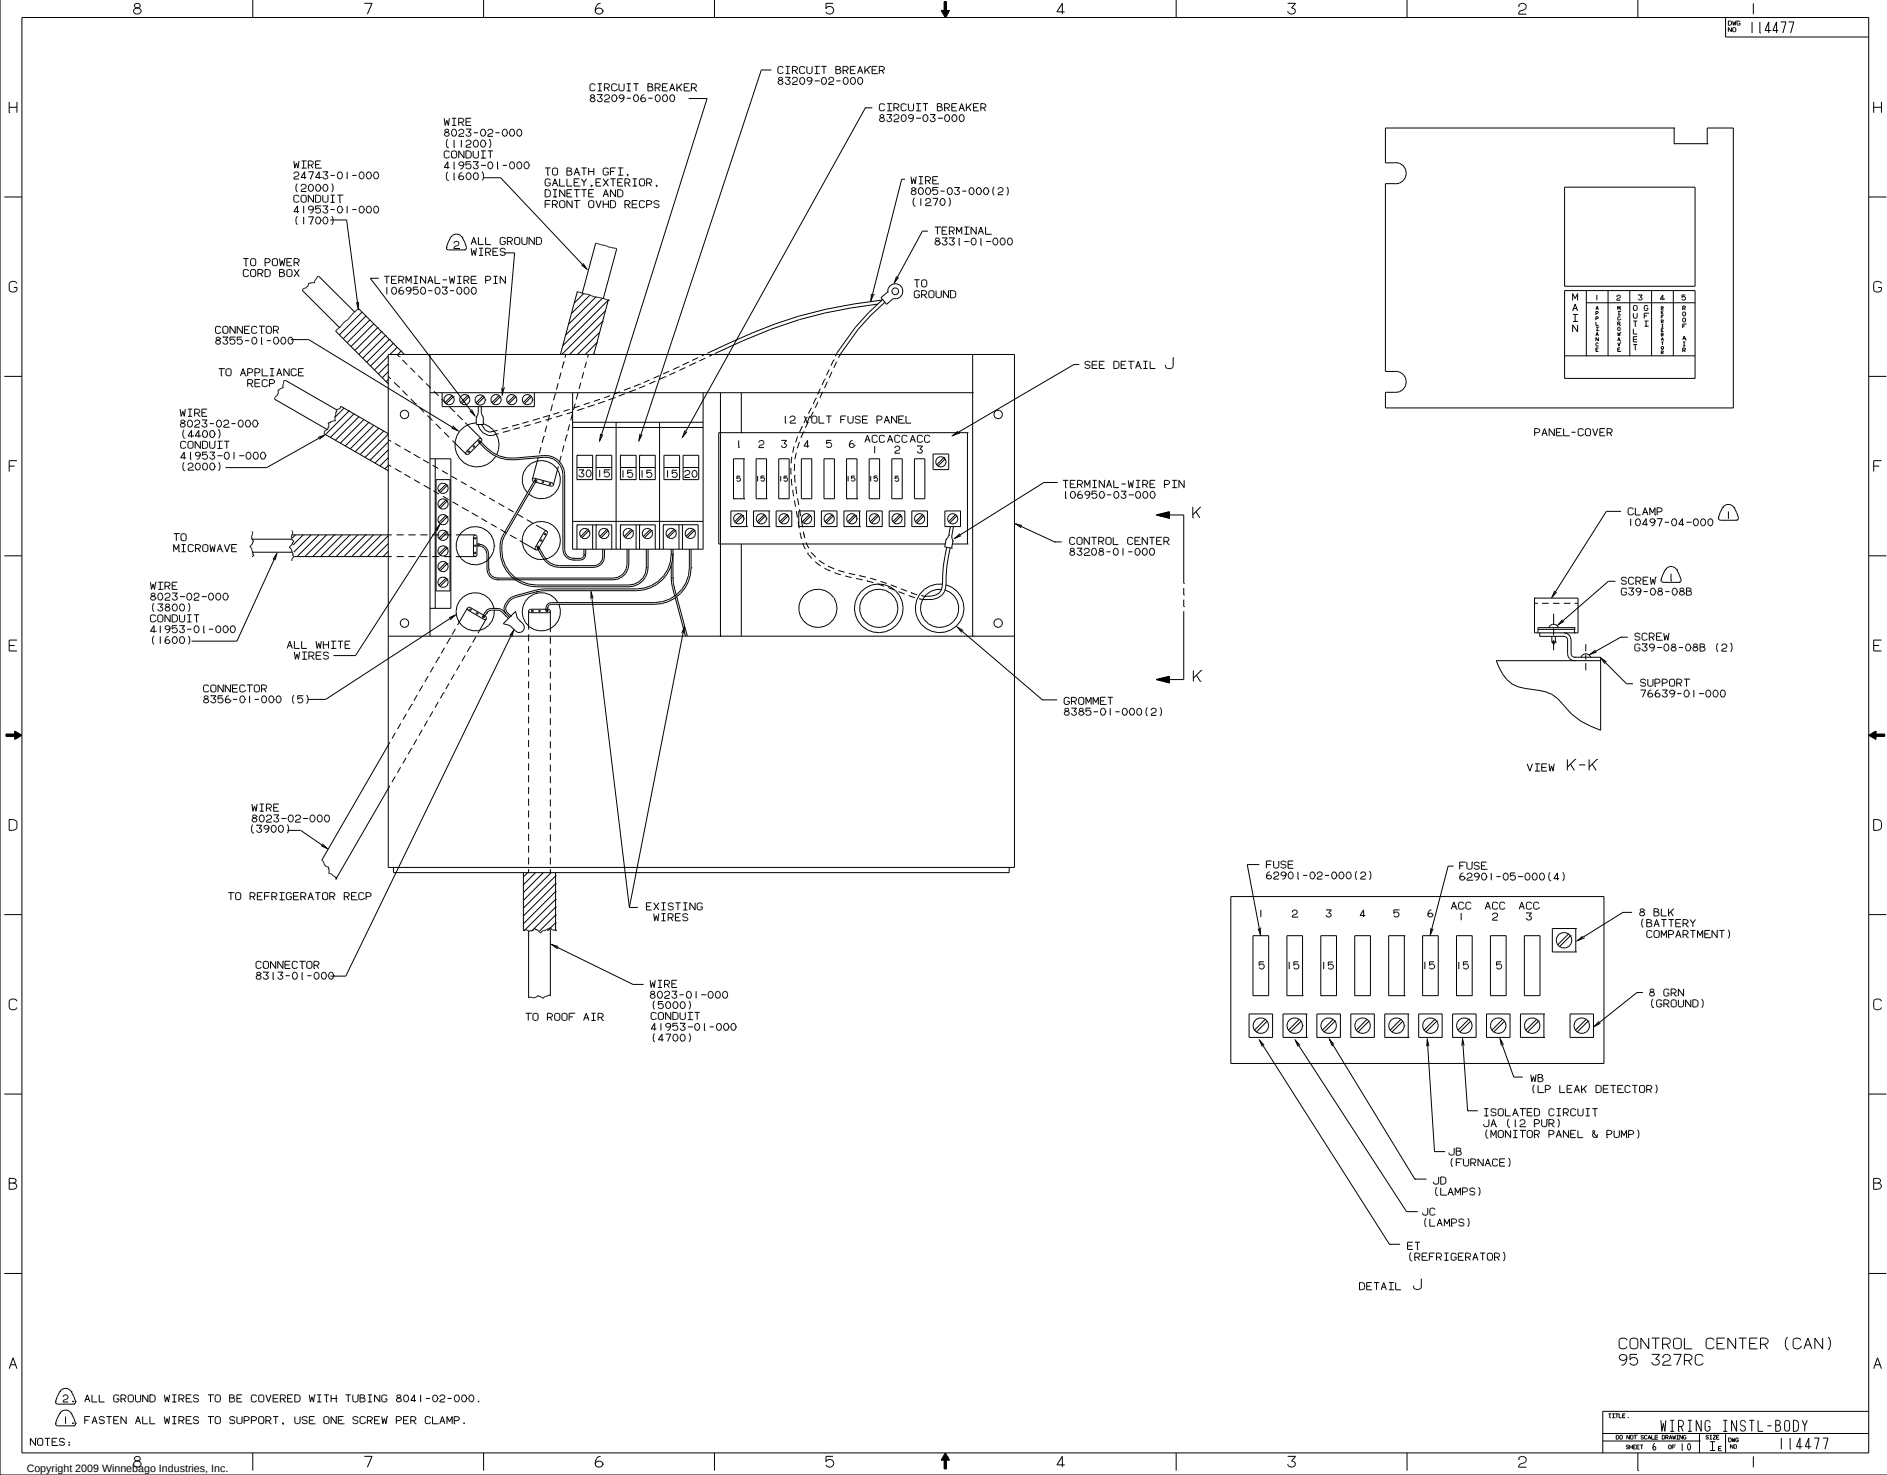

2 ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
1 FASTEN ALL WIRES TO SUPPORT, USE ONE SCREW PER CLAMP.

CONTROL CENTER (CAN)
95 327RC

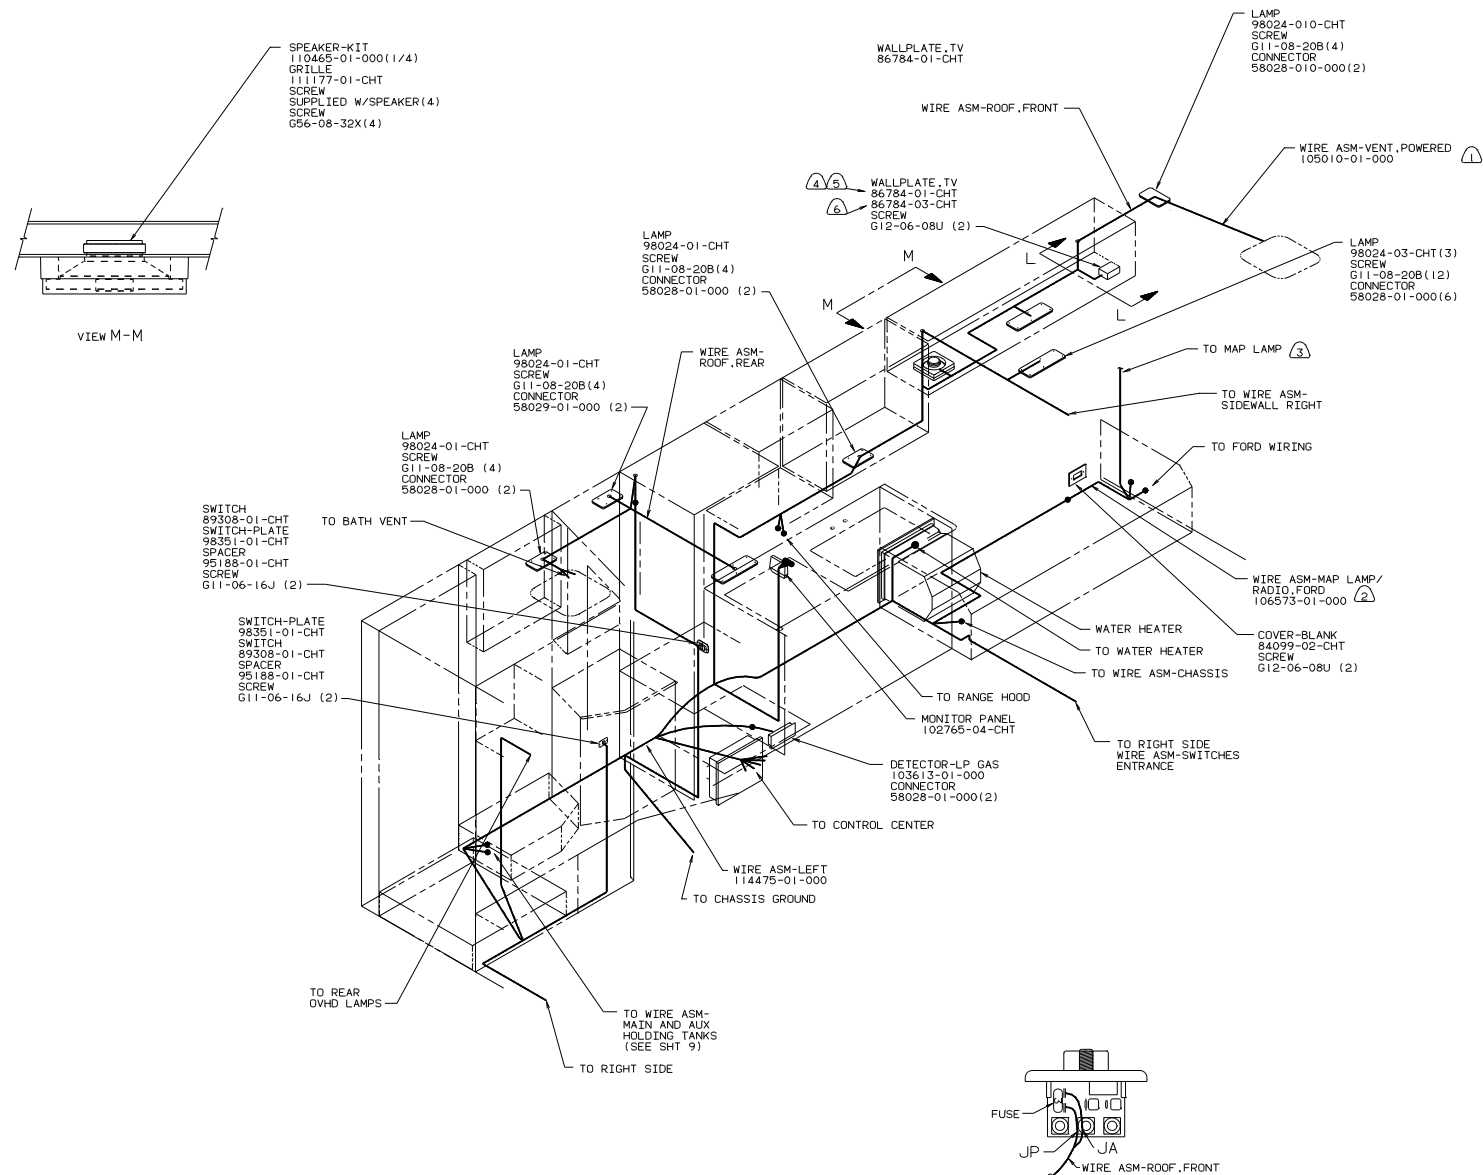


- ① WITH FRONT CONTROL CENTER SWITCHING.
② WITHOUT FRONT CONTROL CENTER SWITCHING.
③ USE WITH TV ANTENNA.
④ ROUTE UP B-PILLAR AND AROUND PERIMETER
OF CAB CUTOOT TO LIGHT.
⑤ SEE RADIO INSTALLATION FOR ADDITIONAL INFORMATION.
⑥ USE WITH FRONT FAN.


NOTES:

12V (US/CAN)
(LEFT SIDE)
95 327RC

TITLE: WIRING INSTL-BODY			
30 NET SCALE DRAWING	FILE	ING	NO
SHEET 7 OF 10	1E		114477

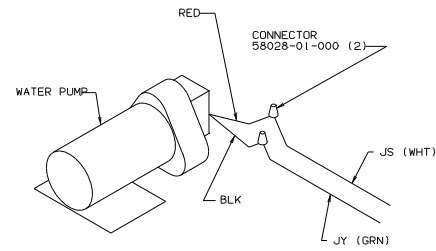






DETAIL S

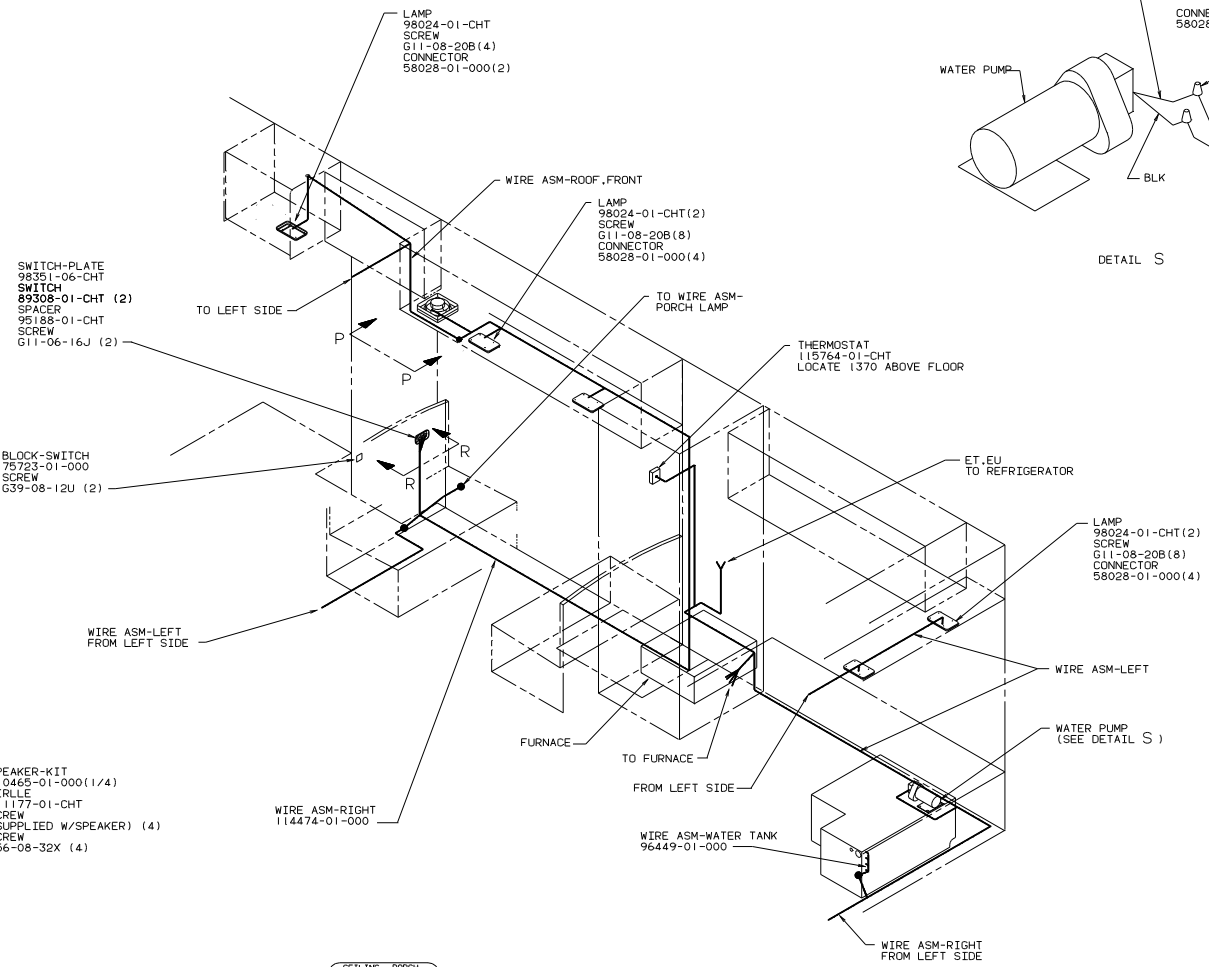

12V. (US/CAN)
RIGHT SIDE
95 327RC

TITLE			
WIRING INSTL-BODY			
DO NOT SCALE DRAWING	FILE	ING	NO
SHEET 8 OF 10	1	1	1
114477			

NOTES:

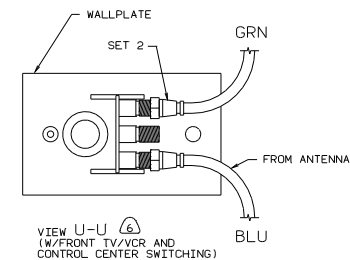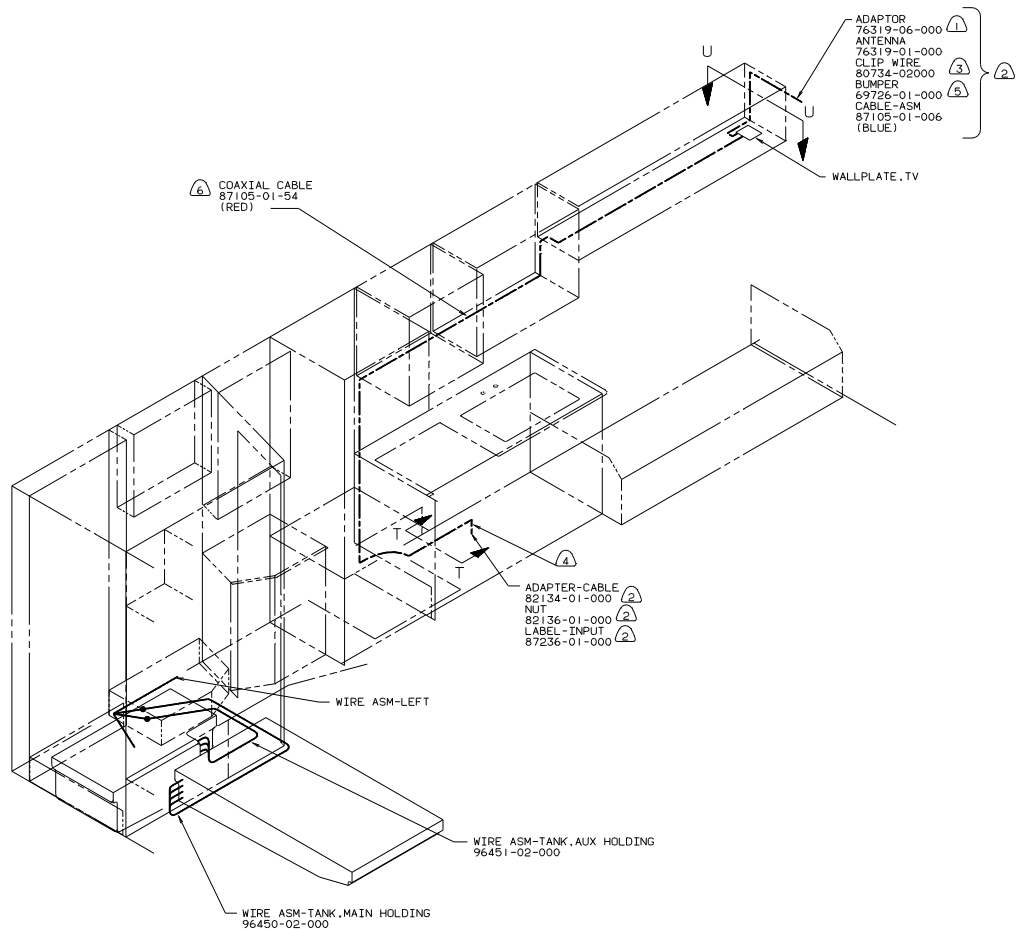

VIEW: T-T (2)

COAXIAL CABLE
95 327RC

- NOTES:
6. WITH FRONT TV, SEE WIRING INSTL-TV/VCR, FRONT FOR ADDITIONAL INFORMATION.
 5. ADD RUBBER BUMPER TO ROOF UNDER EACH END OF ANTENNA IN DOWN POSITION WHICH MAY COME INTO CONTACT WITH ROOF.
 4. ADD 600 CONVOLUTED TUBING 41953-01-000 IN THIS AREA.
 3. LOCATE TO RETAIN CABLE BUT NOT TO RESTRICT ANTENNA TRAVEL.
 2. WITH TV ANTENNA.
 1. SEE DRAWING 76319-01-000 FOR INSTALLATION OF TV ANTENNA.

LAMP-MARKER,BASE
111102-01-000 (5)
LAMP-MARKER,LENS
111102-02-000 (5)
SCREW
G11-08-12U (EXT) (10)

2 AIR CONTIONER
108889-01-CHT
2 CEILING ASM
108891-01-CHT
2 SPRINGS-A/C
102289-01-000 (4)

LAMP-MARKER,BASE
111102-01-000 (5)
LAMP-MARKER,LENS
111102-03-000 (5)
SCREW
G11-08-12U (EXT) (10)

LAMP
97917-01-CHT
SCREW
G11-08-12T (2)
G67-10-12U (EXT) (4)
CONNECTOR
58028-01-000
SEAL

LIGHT
66432-02-000
SCREW
G56-10-12U(EXT) (2)
BRACKET
66432-03-000
SCREW
G11-08-12U (EXT) (4)

1 WIRE ASM-TRAILER ADAPTER
113634-01-000
4 SCREW
101618-01-000(EXT) (2)

HITCH ASM

LAMP-MARKER,BASE
111102-01-000 (2)
LAMP-MARKER,LENS
111102-03-000 (2)
SCREW
G11-08-12U (EXT) (4)

TAIL LAMP ASM
81638-01-000 (2)
SCREW
G67-10-129 (16)
POD TAIL LAMP
103355-01-CHT (2)
SCREW
78538-01-CHT(EXT) (4)

4 USE WITH TRAILER TOW PACKAGE.

3 SECURE WIRE BELOW COACH WITH
CLAMP 10495-01-000 AND SCREW G67-10-12B.

2 WITH ROOF AIR.

1 CONNECTOR-PLUG, TRAILER 113589-01-000 TO BE SUPPLIED
LOOSE IN COACH WITH TRAILER TOW PACKAGE.

NOTES:

EXTERIOR LIGHTING
95 327RC

TITLE: WIRING INSTL-BODY
DO NOT SCALE DRAWING
SHEET 10 OF 10
114477