


DWG NO	--
157129-01	(WIN)
157129-02	(ITA)

RELEASE	REV DATE	REV NO	157129
REV ZONE	REVISION RECORD	DATE	07-08-01

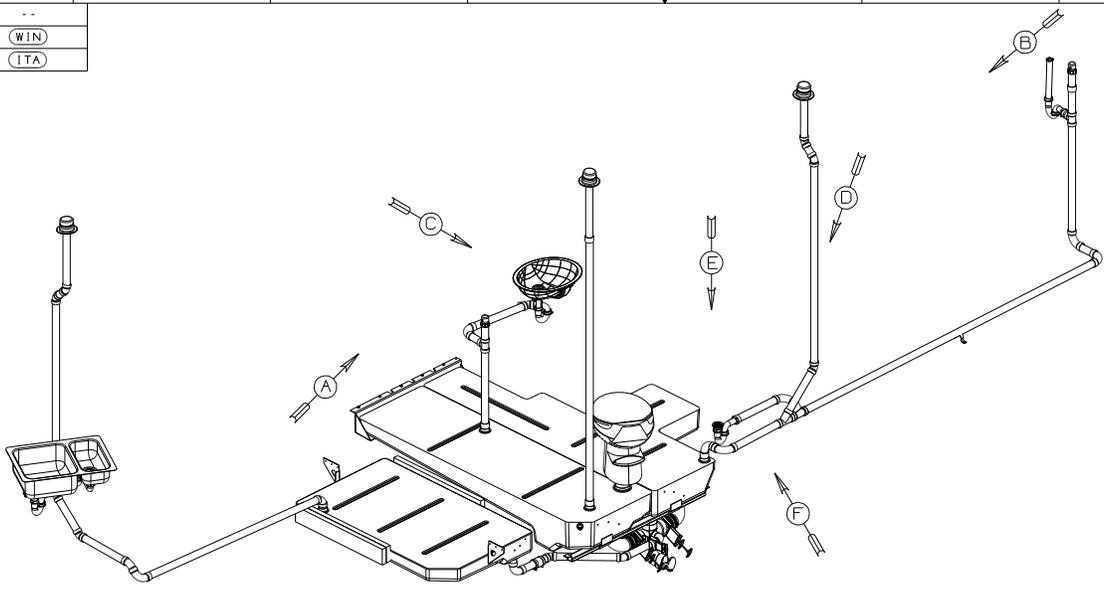

FRONT OF COACH

- (WIN) WINNEBAGO ONLY
- (ITA) ITASCA ONLY
- (IBI) CODES/STANDARDS USA
- (265) CODES/STDS - CSA, CMVSS
- (54E) WASHER DRYER
- (21M) WASHER/DRYER PREP
- (214) DISHWASHER DRAWER STYLE
- (215) DISHWASHER WITHOUT

- △ VENT PIPE MUST PROJECT 51 MIN AND 64 MAX ABOVE ROOF FOR PROPER FIT AND FUNCTION.
5. SEAL AROUND SHOWER WITH SILICONE.
 4. ALL EXTERIOR OPENINGS AROUND PIPE TO BE SEALED WITH 110744-01-000.
 3. ALL PIPE AND FITTINGS TO BE ASSEMBLED WITH SOLVENT 4020-01-000 (US), 4020-02-000 (CAN).
 2. SLOPE OF TRAP ARM MUST BE 6 PER 305 mm.
 1. SLOPE OF HORIZONTAL PIPING TO BE MIN 3 PER 305 mm.

WINNEBAGO		COPYRIGHT 2007 WINNEBAGO INDUSTRIES, INC.	
DATE:	DATE:	ALL DIMENSIONS ARE IN MILLIMETERS	FIRST USE
OWN:	OWN:	07 S40TD	
PL:	PL:		
COL:	COL:		
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
ANGLE DIM (°)	: 3		
FIN-PLAGE (H.H.K)	: 1.5		
FIN-PLAGE (L.H.K)	: 0.50		
FIN-PLAGE	: 12		
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE:		DRAINAGE SYSTEM INSTL	
SHEET 1 of 4	PART NO	157129	
REV		REV	

(X-X)
FOR DRAINAGE CALLOUTS SEE DWG NO 116229-01-000